



Technical Note

Installing Drivers for SST's ISA & PC104 Cards in Windows 2000

Edition: 1.0

Document #: TNO-0004



Edition: 1.0

Date: July 20, 2004

This document applies to the ISA and PC104 families of interface cards.

Copyright ©2004 Woodhead Software & Electronics, Division of Woodhead Canada Limited

This document and its contents are the proprietary and confidential property of Woodhead Industries Inc. and/or its subsidiaries and may not be used or disclosed to others without the express prior written consent of Woodhead Industries Inc. and/or its subsidiaries.

SST is a trademark of Woodhead Software & Electronics. All other trade names are trademarks or registered trademarks of their respective companies.

At Woodhead, we strive to ensure accuracy in our documentation. However, due to rapidly evolving products, software or hardware changes occasionally may not be reflected in our documents. If you notice any inaccuracies, please contact us (see Technical Support details at the end of this document).

**Written and designed at Woodhead Software & Electronics,
50 Northland Road, Waterloo, Ontario, Canada N2V 1N3.**

Hardcopies are not controlled.



Installing Drivers for SST's ISA & PC104 Cards in Windows 2000

Topic overview

For plug and play devices, Windows 2000 is able to detect and automatically configure the device driver. ISA and PC104 interface cards are not plug and play devices; therefore, you must manually configure the interface card.

About this Technical Note

This note explains how to:

- Install an ISA or PC104 card in Windows 2000
- Troubleshoot the installation and contact Technical Support

This Technical Note assumes that:

- You are familiar with the SST ISA or PC104 Interface and related software
- You are familiar with Windows 2000 operating systems and diagnostics tools
- The SST Software and Windows 2000 driver are successfully installed



Hardware used

☒ Interface card	5136-DNP-ISA, 5136-DNP-PC104, SST-DN3-104, 5136-PFB-ISA, 5136-PFB-104, 5136-PBMS-ISA, 5136-SD-ISA, 5136-SD-104, 5136-CN-ISA, 5136-CN-104, 5136-MOD-ISA, 5136- RE2-ISA
☒ Physical I/O	N/A

Software used


☒ Operating system	Windows 2000
☒ Any other software required (network configuration software)	Windows 32-bit Software shipped with you ISA or PC104 Interface

Recommended reading

- Your ISA or PC104 Hardware Reference Guide





Procedure:

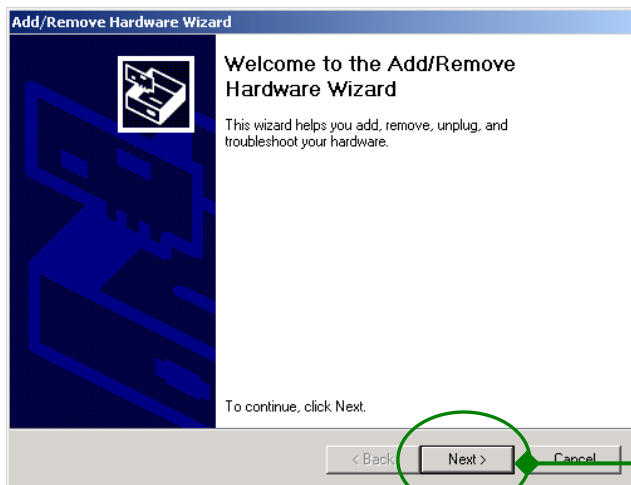

Go to *Start > Settings > Control Panel* and select the **Add/Remove Hardware** applet. Press Next.


Select "Add/Troubleshoot a device" and press Next.

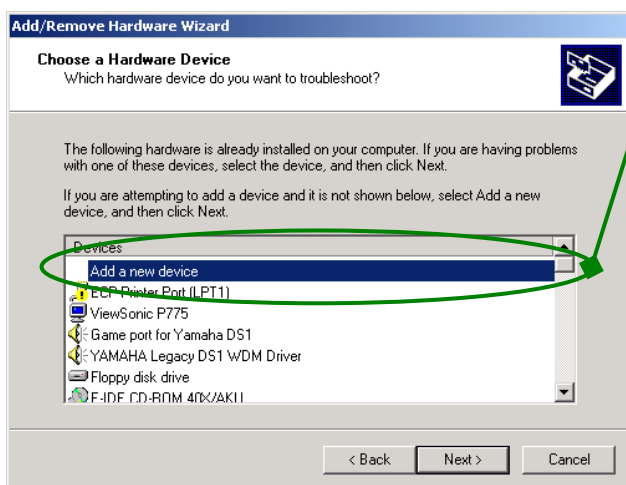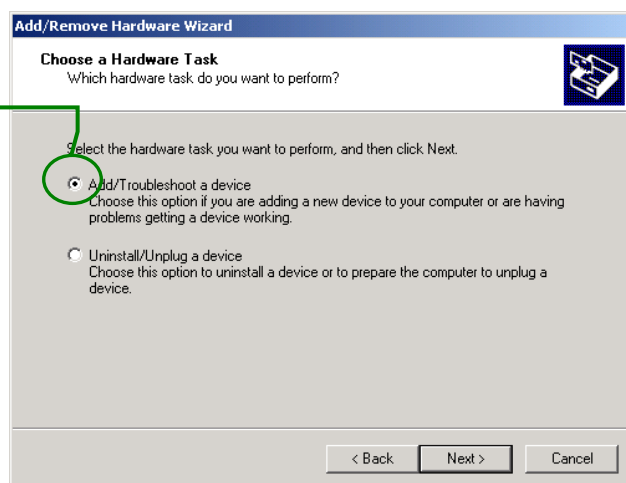

Select "Add a new device" and press Next.





Select "No, I want to select the hardware from a list" and press Next.


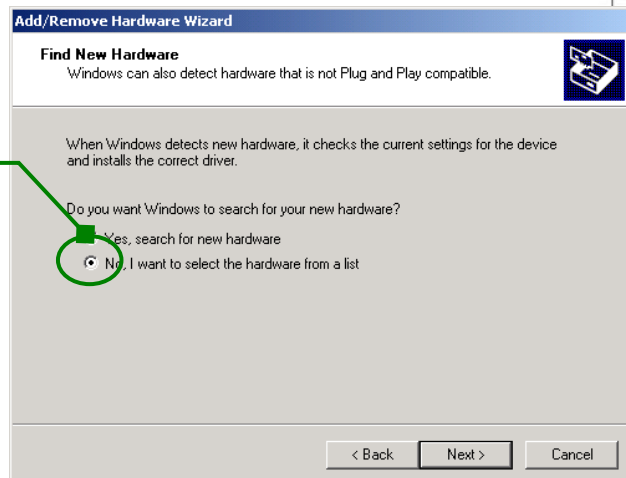


If you have an option for "Industrial Network Adapters", select it and press Next. Skip the next step.

OR



Select "Other devices" and press Next.

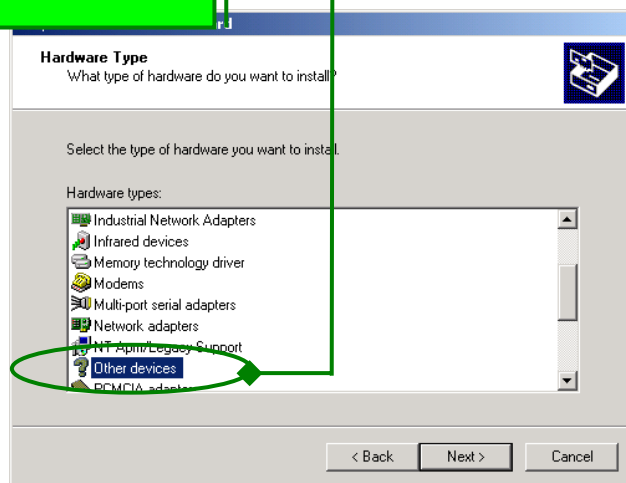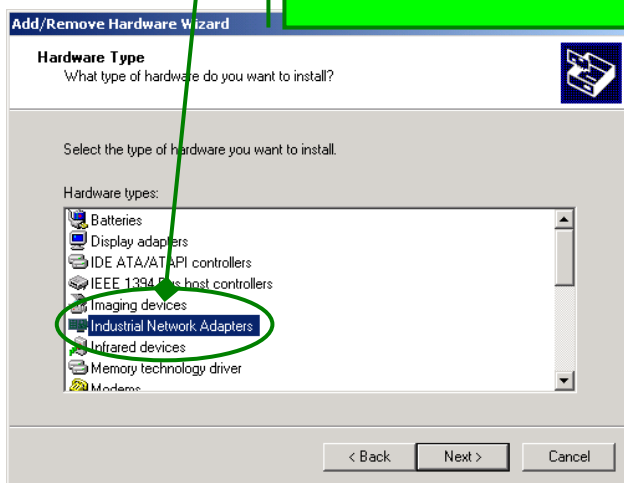

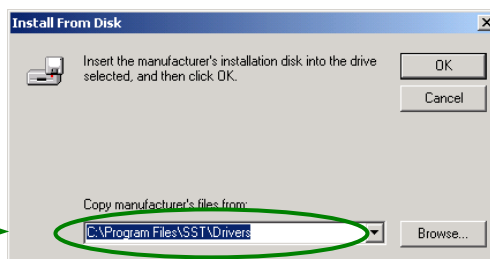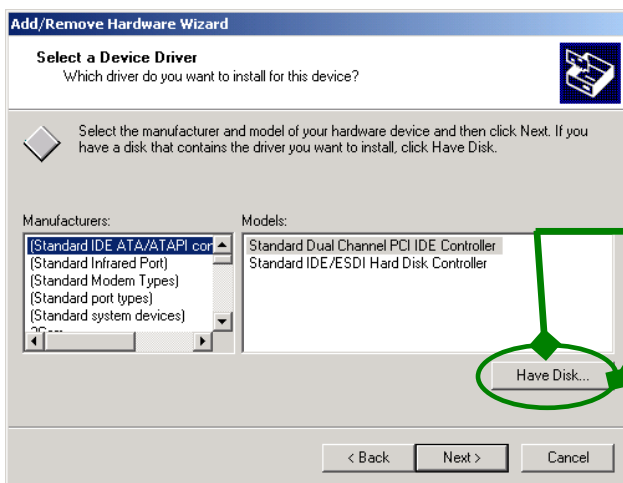

Select "Have Disk...".
Browse to "**Program Files\SST\Drivers**" and press OK.
Press Next.

From the list, select your ISA or PC104 hardware and press Next.

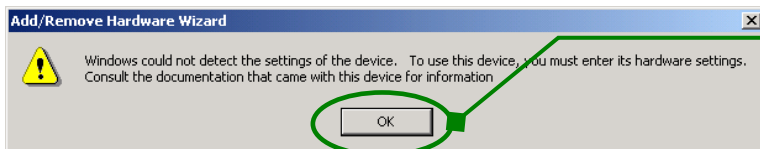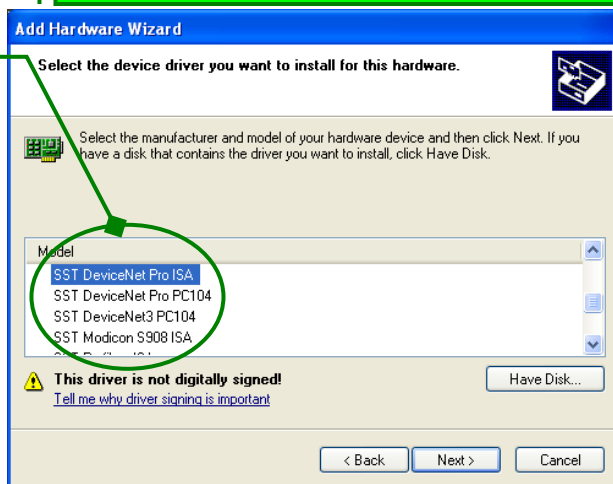



To continue installing your card, press OK.

Configure the resource settings for your card. Refer to your interface card reference manual for memory resource settings.

To avoid conflicts with other devices, ensure that "Conflicting Device list" reports no conflicts.

Note: If you do not wish to configure an interrupt, change "Settings based on:" to "Basic Configuration 0001".

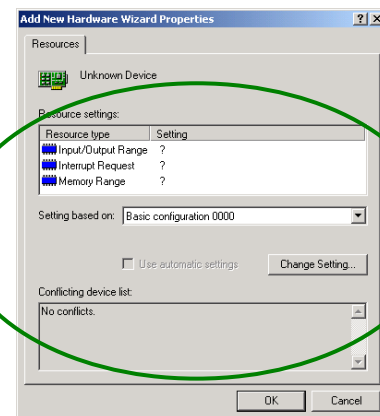

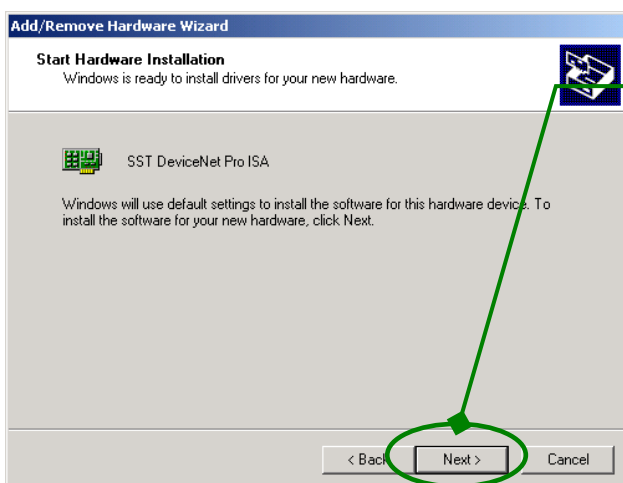

To continue installing your card, press Next.

Press Finish and restart your PC.





Troubleshooting

If you cannot access your card, please verify the following:

1. Check that you have configured the card's switches for the correct IO port address (for details, see the documentation for the card).
2. In the Windows Device Manager, browse to **Industrial Network Adapters** and verify that the resources for your interface card do not conflict with another device in your machine. For help with Windows Device Manager, please consult your Microsoft documentation.

Technical support

Technical support is available during regular business hours by telephone, fax or email from any Woodhead Software & Electronics office, or from www.mySST.com. Documentation and software updates are also available on the website.

North America

Canada:
Tel: 519-725-5136
Fax: 519-725-1515
Email: supportna@woodhead.com

Europe

France:
Tel: 33-2-32-96-04-20
Fax: 33-2-32-96-04-21
Email: supportfr@applicom-int.com

United Kingdom:
Tel: 44 -161-285-8686
Fax: 44 -161-285-8686
Email: mylseh@woodhead.com

Germany:
Tel: 49-711-782374-0
Fax: 49-711-782374-11
Email: infode@applicom-int-com

Italy:
Tel: 30-9-10-59-30-77
Fax: 39-10-59-56-925
Email: imainfo@imaweb.it

Asia-Pacific

Japan:
Tel: 81 3-5791-4621
Fax: 81 3-5791-4688
Email: sst@woodhead.co.jp

Singapore:
Tel: 65-261-6533
Fax: 65-265-6605
Email: info@woodhead.com.sg